

TXE1eco

THE RELIABLE BASE PUMP FOR TENSIONERS



MANOMETER

Manometer integrated in the pump pressure gauge for easy control of the pressure

7L OIL VOLUME

for large or several simultaneously connected tools

OPERATION


via cable remote control

FEATURES

- ▶ Attractive price
- ▶ Fast & safe tensioning up to 1500bar
- ▶ Easy operation via cable remote control
- ▶ Stepless adjustable pressure thanks to manual adjustment valve
- ▶ Pressure build-up and electrical pressure relief at the push of a button
- ▶ Manual safety relief for extreme cases
- ▶ Resistant due to robust protective frame



TXE1eco

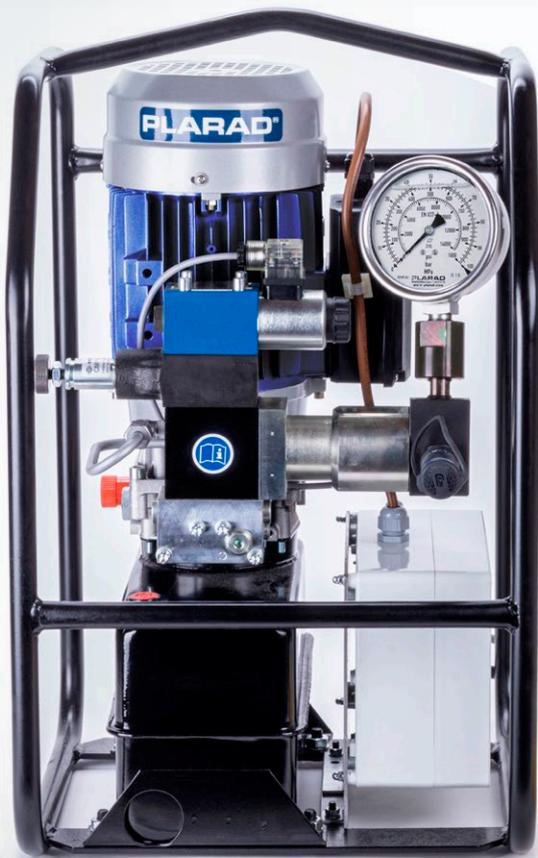

The TXE1eco from PLARAD® is a robust and reliable basic pump for tensioning applications. The power unit is equipped with a powerful electric motor and can be effortlessly connected to large tensioners thanks to the 7L tank.

has an integrated pressure gauge for easy reading and control of the pressure. The unit is easy to operate by remote control and is perfect for applications where no documentation is required.

It offers a maximum operating pressure of 1500 bar and a flow rate of up to 3 l/min. In addition, the pump

TXE1eco // data

Dimensions (WxHxD)	380 x 630 x 360mm
Max. pressure	1500bar
Voltage variants	230V 50/60Hz // 110V 50/60Hz 400V 50Hz 460V 60Hz // 480V 60Hz
Power	1,1kW
Flow rate	0 - 120 bar ▶ 3,0 l/min 120 - 1500 bar ▶ max 0,35 l/min
Oil volume	7l
Weight	~38kg
Relief	electric + manual

